

Overview



MASS 2100 DI 3 to DI 15 is suitable for accurate mass flow measurement of a variety of liquids and gases.

The sensor offers superior performance in terms of flow accuracy, turn-down ratio and density accuracy. The ease of installation through a "plug & play" mechanical and electrical interface ensures optimum performance and operation.

The sensor delivers true multi-parameter measurements i.e.: Mass flow, volume flow, density, temperature and fraction.

Benefits

- High accuracy better than 0.1 % of mass flow rate
- Large dynamic turn-down ratio better than 500:1
- Densitometer performance available through density accuracy (depending upon sensor size) ranging from 0.0005 to 0.0015 g/cm³ with a typical repeatability better than 0.0001 to 0.0002 g/cm³
- Single continuous tube design, with no internal welds, reductions or flow splitters offers optimal hygiene, safety and CIP cleanability for food and beverage and pharmaceutical applications
- Markets' thickest sensor walls ensure optimal life-time and corrosion resistance and high-pressure durability
- Full bore design provides lower pressure loss due to same internal diameter throughout the entire sensor
- Balanced pipe design with little mechanical energy loss, ensures optimal performance and stability under non-ideal and unstable process conditions (pressure, temperature, density changes etc.)
- 4-wire Pt1000 temperature measurement ensures optimum accuracy on mass flow, density and fraction flow
- Multi-plug electrical connector and SENSOPROM enables true "plug & play". Installation and commissioning in less than 10 minutes
- Intrinsically safe Ex design ia IIC as standard, making service in hazardous area possible without having to demount the sensor if a compact Ex d transmitter needs service
- Sensor pipe available in high-quality stainless steel AISI 316L/1.4435 or Hastelloy C22/2.4602 offering optimum corrosion resistance
- Centre-block design decouples process noise from the environment such as vibrations, pulsations, pressure shocks etc. making installation flexible and versatile
- Rugged and space-saving sensor design in stainless steel matching all environments
- High-pressure program as standard
- The sensor calibration factor is also valid for gas measurement
- Uniform sensor interface matching all transmitter versions at the same time whether it is compact IP67/NEMA 6, compact Ex d or remote installation, one sensor fits all

Application

Coriolis mass flowmeters are suitable for measuring all liquids and gases. The measurement is independent of changes in process conditions/parameters such as temperature, density, pressure, viscosity, conductivity and flow profile.

Due to this versatility the meter is easy to install and the Coriolis flowmeter is recognized for its high accuracy in a wide turn-down ratio which is a paramount in many applications.

The main applications of the Coriolis flowmeter can be found in all industries, such as:

Chemical and pharma	Detergents, bulk chemicals, pharmaceuticals, acids, alkalis
Food and beverage	Dairy products, beer, wine, soft-drinks, Brix/Plato, fruit juices and pulps, bottling, CO ₂ dosing, CIP-liquids
Automotive	Fuel injection nozzle and pump testing, filling of AC units, engine consumption, paint robots
Oil and gas	Filling of gas bottles, furnace control, test separators, LPG
Water and waste water	Dosing of chemicals for water treatment

The wide variety of combinations and versions from the modular system means that ideal adaptation is possible to each measuring task.

Design

The MASS 2100 sensor consists of a single bent tube in a double bent pipe configuration, welded directly to the process connectors at each end.

The centre-block is brazed onto the sensor pipes from the outside acting as a mechanical low pass filter.

The sensor is available in 2 material configurations, AISI 316L/1.4404 or Hastelloy C22/2.4602 with a wide variety of process connections.

The enclosure is made in stainless steel AISI 316L/1.4404 with a grade of encapsulation of IP67.

The sensor is as standard Ex ia approved, intrinsically safe.

The sensor can be installed in horizontal or vertical position. In horizontal position the sensor is self draining.

Heating: All the sensors MASS 2100, DI 3 to DI 15, can optionally be equipped with a heating coil to avoid solidification of sensitive fluids during down-time or period between discontinuing processes. This feature gives the user an alternative to the costly electrical heating normally used, as it gives the freedom to choose either hot water, superheated steam or hot oil, to maintain a constant temperature inside the sensor.

Flow Measurement

SITRANS F C

Flow sensor MASS 2100 DI 3 to DI 15

Function

The measuring principle is based on the Coriolis effect. See "System information SITRANS F C Coriolis mass flowmeters".

Integration

The sensor can be connected to all MASS 6000 transmitters for compact and remote installation as well as SIFLOW FC070 standard and Ex type transmitters.





All sensors are delivered with a SENSORPROM containing all information about calibration data, identity and factory pre-programming of transmitter settings.



Installation guidelines MASS 2100 DI 3 ... DI 15 (1/8" ... 1/2")

Installation of sensor

In order to perform according to given specifications for flow and density accuracy, the sensor must be installed using rigid mounting brackets as shown in the installation examples.


If the liquid is volatile or contains solid particles, vertical mounting is not recommended.

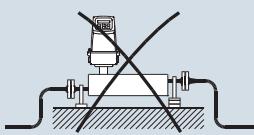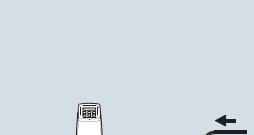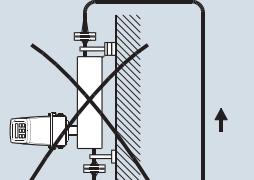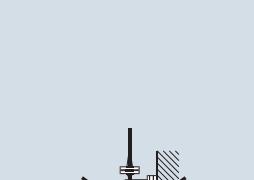	Liquid	Gas
Horizontal		
Vertical		

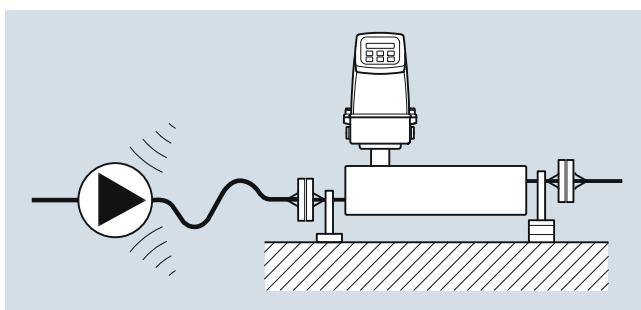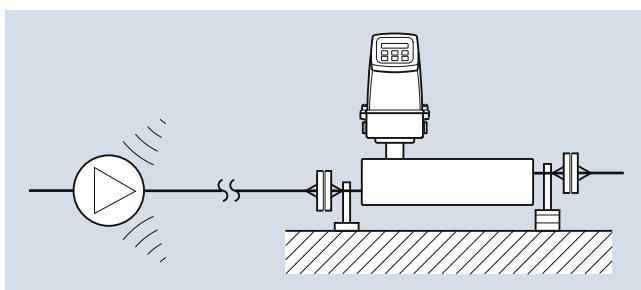


Vibration

Always locate the flowmeter as far away as possible from components that generate mechanical vibration in the piping.

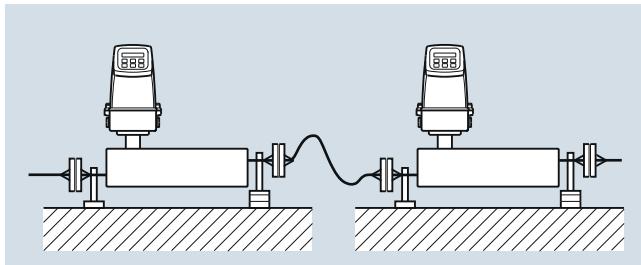

Cross talk

Cross talk between sensors mounted close to each other may disturb the measurement. To avoid cross talk never mount more than one meter on each frame and mount flexible hose connections between the sensors as shown.

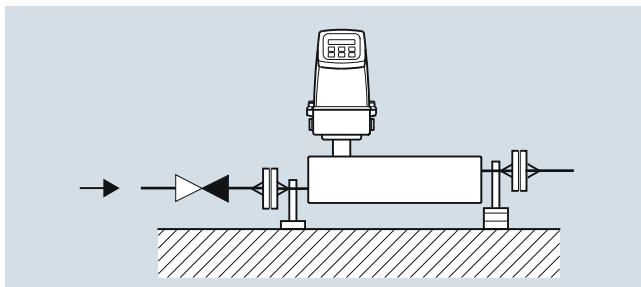

Zero point adjustment

To facilitate zero point adjustment a shut-off valve should always be mounted in connection with the sensor as a proper zero point setting is essential for a good accuracy.

Technical specifications

Versions (mm (inch))	DI 3 (1/8)	DI 6 (1/4)	DI 15 (5/8)
Inside pipe diameter (sensor consists of one continuous pipe) mm (inch)	3.0 (0.12)	6.0 (0.24)	14.0 (0.55)
Pipe wall thickness mm (inch)	0.5 (0.02)	1.0 (0.04)	1.0 (0.04)
Mass flow measuring range kg/h (lb/h)	0 ... 250 (0 ... 550)	0 ... 1000 (0 ... 2200)	0 ... 5600 (0 ... 12345)
Density g/cm ³ (lb/inch ³)		0 ... 2.9 (0 ... 0.10)	
Fraction e.g. °Brix		0 ... 70 (applicable temperature range: 10 ... 99 °C (50 ... 210.2 °F))	
Temperature			
Standard °C (°F)		-50 ... +180 °C (-58 ... +356 °F)	
Liquid pressure measuring pipe¹⁾			
Stainless steel bar (psi)	230 (3336)	265 (3844)	130 (1885)
Hastelloy C22/2.4602 bar (psi)	350 (5076)	410 (5946)	200 (2900)
Materials			
Measuring pipe, flange and thread connection		Stainless steel AISI 316L/1.4435 Hastelloy C22/2.4602	not available
Enclosure and enclosure material		IP67 (NEMA 4) and stainless steel AISI 316L/1.4404, The housing is not rated for pressure containment	
Process connections²⁾			
Flange			
EN 1092-1, PN 40		DN 10	DN 15
ANSI B16.5, Class 150		½"	½"
ANSI B16.5, Class 600 (Class 300)		½"	½"
Dairy screwed connection (PN 16/25/40) ³⁾			
DIN 11851		DN 10	DN 15
ISO 2853/BS 4825 part 4 (SS3351)		25 mm	25 mm
Dairy clamp connection (PN 16) ³⁾			
ISO 2852/BS 4825 part 3 (SMS3016)		25 mm	25 mm
Thread			
ISO 228/1, PN 100	G ¼" female	G ¼" male	G ½" male
ANSI/ASME B1.20.1, PN 100	¼" NPT female	¼" NPT male	½" NPT male
Cable connection	Multiple plug connection to sensor 5 x 2 x 0.35 mm ² twisted and screened in pairs, ext. Ø 12 mm		
Ex-version			
ATEX, EAC Ex, c-UL-us		Zone 1: Ex ia IIC T3...T6 Ga	
UL (c-UL-us)		Class I, Div. 1: Grp. A, B, C, D	
Weight approx.	kg (lb)	4 (8.8)	8 (17.6)
			12 (26.5)

¹⁾ Max. at 20 °C (68 °F), DIN 2413, DIN 17457²⁾ Other connections to order, see "Selection and Ordering data"³⁾ Material, AISI 316/1.4404 or corresponding


For accuracy specification see "System information SITRANS F C".

Flow Measurement


SITRANS FC

Flow sensor MASS 2100 DI 3 to DI 15


Pressure drop

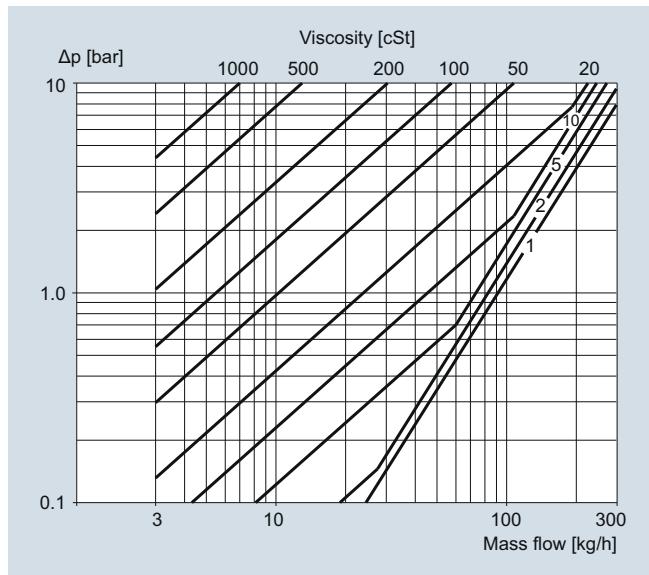


MASS 2100 DI 3 (1/8"), pressure drop for density = 1000 kg/m³

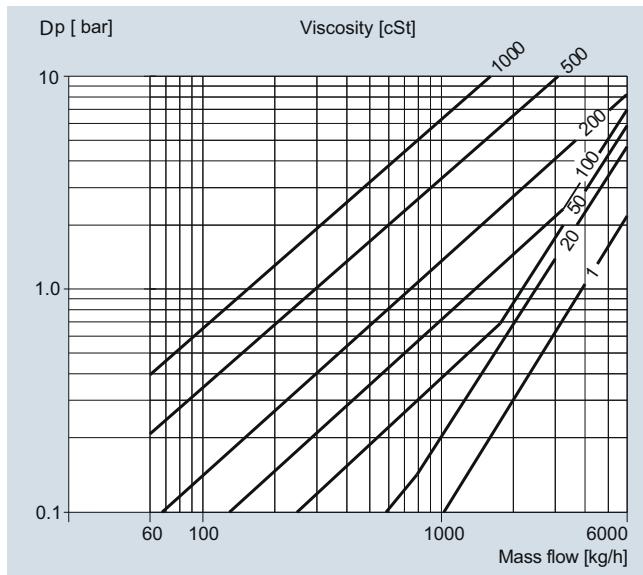


MASS 2100 DI 15 (1/2"), pressure drop for density = 1000 kg/m³

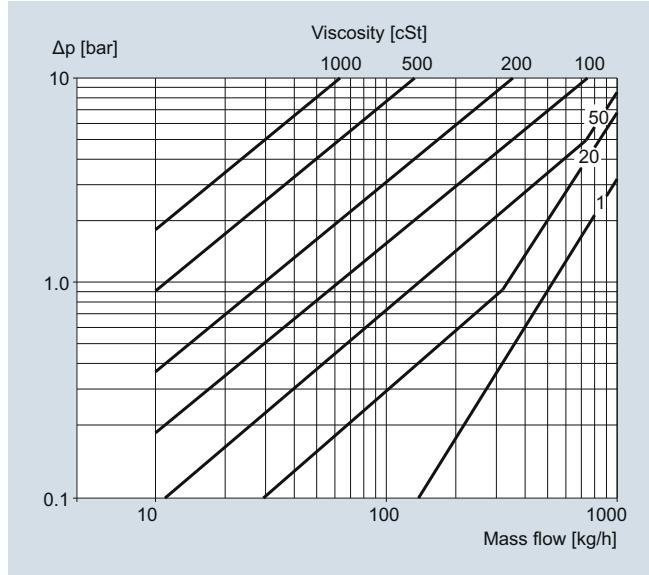


MASS 2100 DI 6 (1/4"), pressure drop for density = 1000 kg/m³

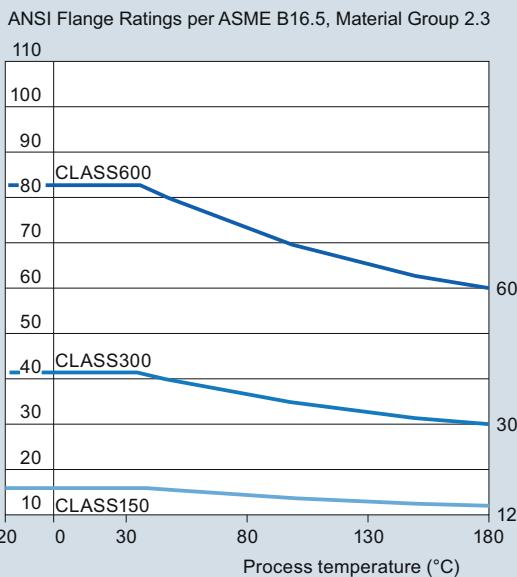Pressure/temperature curves


ASME flanges B16.5 stainless steel

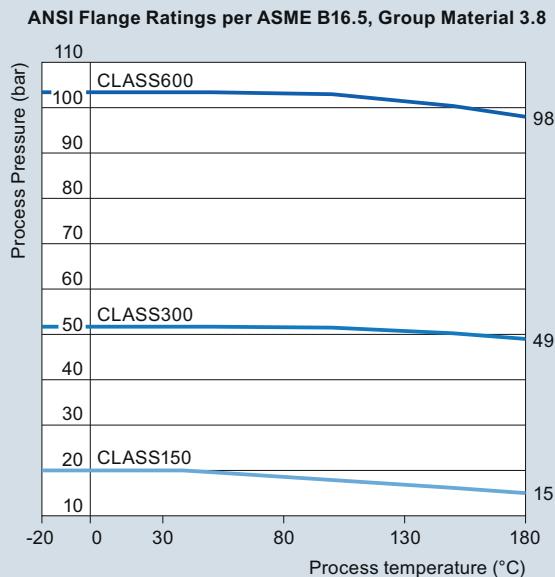


ASME flanges B16.5 Hastelloy C22/2.4602

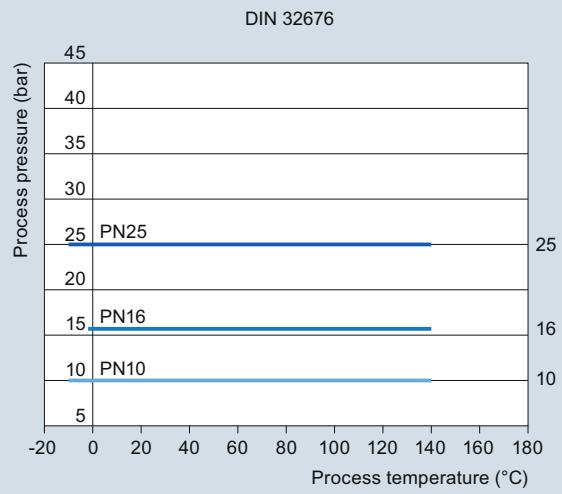

DIN 32676 flanges stainless steel (PN 10 ... PN 25)

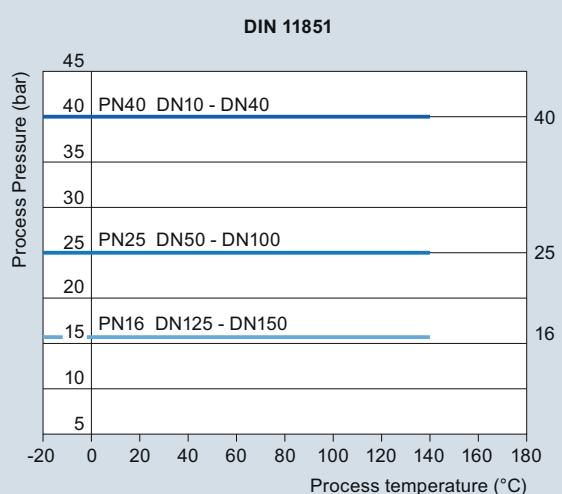

DIN 11851 flanges stainless steel (PN 25 ... PN 40)

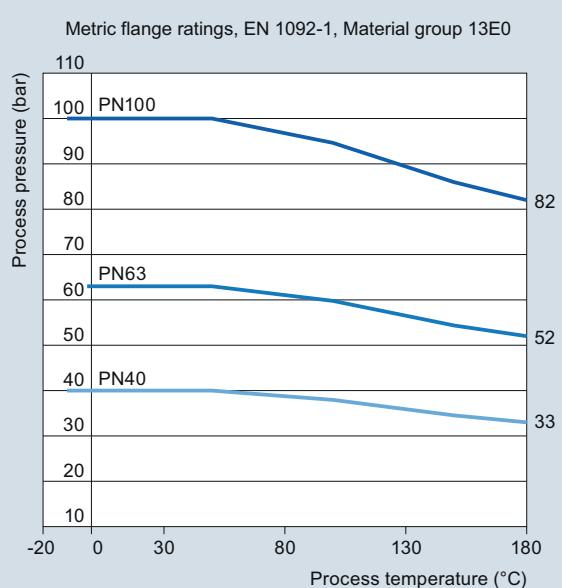


EN 1092 flanges stainless steel (PN 40 ... PN 100)


Flow Measurement

SITRANS FC

Flow sensor MASS 2100 DI 3 to DI 15

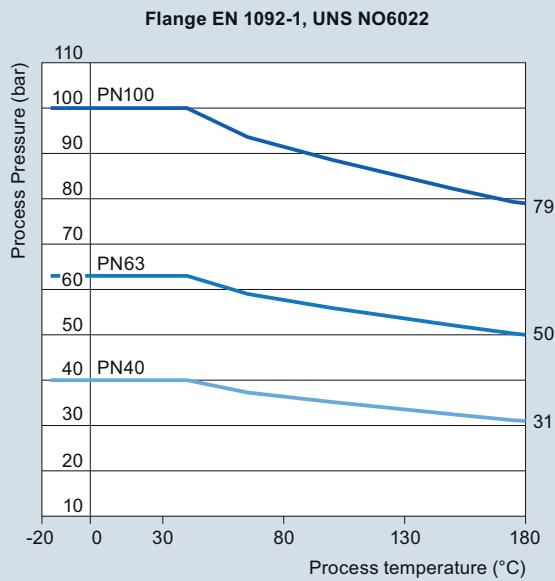


EN 1092 flanges Hastelloy C22/2.4602 (PN 40 ... PN 100)

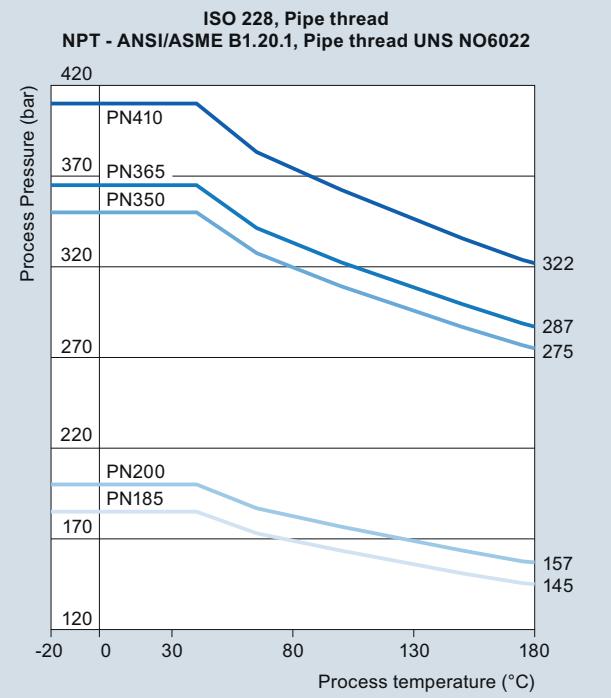

ISO 218 and NPT pipe thread stainless steel (PN 185 ... PN 410)

For further information on the PED standard and requirements, see page 9/6.

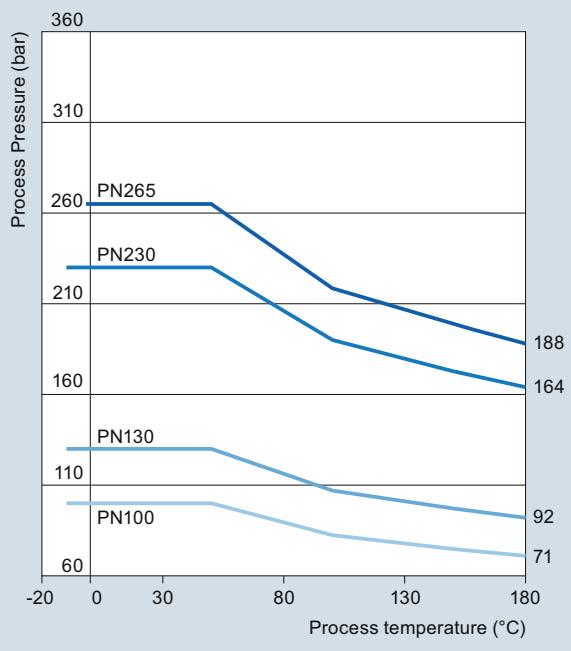

ISO 228 and NPT pipe thread stainless steel (PN 100 ... PN 265)

Flow Measurement

SITRANS F C

Flow sensor MASS 2100 DI 3 to DI 15

Selection and Ordering data		Article No.	Ord. code	Selection and Ordering data		Article No.	Ord. code
SITRANS F C sensors				SITRANS F C sensors			
MASS 2100 without heating jacket	↗	7 ME 4 1 0 0 -		MASS 2100 without heating jacket		7 ME 4 1 0 0 -	
MASS 2100 heated, DN 15 connection	↗	7 ME 4 2 0 0 -		MASS 2100 heated, DN 15 connection		7 ME 4 2 0 0 -	
MASS 2100 heated, ½ inch, ANSI B16.5 connection	↗	7 ME 4 2 1 0 -		MASS 2100 heated, ½ inch, ANSI B16.5 connection		7 ME 4 2 1 0 -	
<p>↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.</p>							
Diameter				Dairy screwed connection DIN 11851			
Stainless steel AISI 316L/1.4435		1 C		DN 10 (PN 40)		4 0	
DI 3 (PN 100/PN 230)		1 D		DN 15 (PN 40)		4 1	
DI 6		1 E		DN 25 (PN 40)		4 2	
DI 15				Dairy clamp connection ISO 2852 (DIN 32676)			
Hastelloy C22/2.4602		2 C		Cone down the sensor in order to obtain self-drainage with connectors ISO 2852			
DI 3 (PN 100/PN 350)		2 D		25 mm (PN 16)		5 0	
DI 6				38 mm (PN 16)		5 1	
Pressure		A		51 mm (PN 16)		5 2	
PN 16 (DI 6, DI 15)		B		Dairy screwed connection ISO 2853			
PN 25 (DI 6, DI 15)		C		25 mm (PN 16)		6 0	
PN 40 (DI 6, DI 15)		D		38 mm (PN 16)		6 1	
PN 100 (DI 3, DI 6, DI 15)		G		51 mm (PN 16)		6 2	
PN 130 (DI 15, ½", AISI 316L/1.4404)		K		Configuration/calibration type			
PN 200 (DI 15, ½", Hastelloy C22/2.4602)		L		Standard		1	
PN 230 (DI 3, ¼", AISI 316L/1.4404)		M		Density		2	
PN 265 (DI 6, ¼", AISI 316L/1.4404)		N		Brix/Plato		3	
PN 350 (DI 3, ¼", Hastelloy C22/2.4602)		Q		Fraction (specification required)		9	
PN 410 (DI 6, ¼", Hastelloy C22/2.4602)		R		Transmitter compact mounted on sensor			
Class 150 (DI 6, DI 15)		S		No transmitter, sensor and adapter only		A	
Class 600 (DI 6, DI 15)				MASS 6000, Ex d, stainless steel enclosure, 1 current, 1 freq./pulse and 1 relay output, 24 V AC/DC with Ex d e ib [ia Ga] IIC T4 Gb Ex-approval		B	
Process connection/flange				MASS 6000, IP67, Polyamide enclosure, cable glands M20, 1 current, 1 freq./pulse and 1 relay output, 24 V AC/DC		C	
Pipe thread		1 0		MASS 6000, IP67, Polyamide enclosure, cable glands M20, 1 current, 1 freq./pulse and 1 relay output, 115/230 V AC 50/60 Hz		D	
G ¼"		1 1		MASS 6000, IP67, Polyamide enclosure, cable glands ½" NPT, 1 current, 1 freq./pulse and 1 relay output, 24 V AC/DC		E	
¼" NPT		1 2		MASS 6000, IP67, Polyamide enclosure, cable glands ½" NPT, 1 current, 1 freq./pulse and 1 relay output, 115/230 V AC 50/60 Hz		F	
G ½"		1 3		Cable			
½" NPT		1 4		No cable		A	
G 1		1 5		5 m (16.4 ft) cable		B	
1" NPT		1 6		10 m (32.8 ft) cable		C	
G 2"		1 7		25 m (82 ft) cable		D	
2" NPT		2 0		50 m (164 ft) cable		E	
Flange EN1092-1 Form B		2 1		75 m (246 ft) cable		F	
DN 10 (PN 40/PN 100)		2 2		150 m (492 ft) cable		G	
DN 15 (PN 40/PN 100)				Calibration/verification			
DN 25 (PN 40/PN 100)		3 0		Standard calibration 3 flow x 2 points		1	
Flange ASME/ANSI B 16.5				Stand. calibration matched pair 3 flow x 2 points		2	
½" (class 150/class 600)				Accredited calibration matched pair 5 flow x 2 points (DANAK to ISO 17025)		3	
				Extended calibration customer-specified select Y60, Y61, Y62 or Y63 (see additional information)		8	

Flow Measurement

SITRANS F C

Flow sensor MASS 2100 DI 3 to DI 15

Dairy MLFB example

MASS 2100

Sensor size DI 15,
AISI 316L/1.4435

PN 40

DN 15 connector

Standard configuration/calibration

MASS 6000 IP67 compact mounted

No cable

Standard calibration, 3 flow x 2 points



Selection and Ordering data

Additional information

Please add “-Z” to Article No. and specify Order code(s) and plain text.

Pressure testing certificate PED: 2014/68/EU

Material certificate EN 10204-3.1

NDT-X-ray inspection report: EN 1435
DI3 sensor only: NDT-Penetrant inspection report
ISO 3452.

Factory certificate according to EN 10204 2.2

Factory certificate according to EN 10204 2.1

Tag name plate, stainless steel

Tag name plate, plastic

Customer-specific transmitter setup

Customer-specified, matched pair (5 x 2)

Customer-specified calibration (5 x 2)

Customer-specified, matched pair (10 x 1)

Customer-specified calibration (10 x 1)

Cleaned for oil and grease

Special version

Order code

C11

C12

C13

C14

C15

Y17

Y18

Y20

Y60

Y61

Y62

Y63

Y80

Y99

Selection and Ordering data

Accessories

Description

Dimension

Article No.

Mating parts for hygienic fittings
DIN 11851 (AISI 316L)

Includes:

- 2 unions
- 2 mating parts (for welding in)
- 2 EPDM gaskets



DN 10

FDK:085U1016

DN 15

FDK:085U1017

DN 25

FDK:085U1019

Mating parts for hygienic clamp
ISO 2852 (AISI 316L)

Includes:

- 2 clamps
- 2 mating parts
- 2 EPDM gaskets



25 mm

FDK:085U1029

2 EPDM gaskets with collar for
mounting set DIN 11851



DN 10

FDK:085U1006

DN 15

FDK:085U1007

DN 25

FDK:085U1009

Description

Length

Article No.

Cable with multiple plug

Standard blue cable between
MASS 6000 and MASS 2100,
5 x 2 x 0.34 mm² twisted and
screened in pairs. Temperature
range -20 °C ... +110 °C
(-4 °F ... +230 °F)



5 m (16.4 ft)

FDK:083H3015

10 m (32.8 ft)

FDK:083H3016

25 m (82 ft)

FDK:083H3017

50 m (164 ft)

FDK:083H3018

75 m (246 ft)

FDK:083H3054

150 m (492 ft)

FDK:083H3055

Spare parts

Description

Article No.

Adapter for MASS 2100

FDK:083L8889

Multiple plug for cable mounting


FDK:083H5056

2 kB SENSORPROM unit, including programming

(Sensor Serial No. and Article No. must be
specified by ordering)



FDK:083H4410

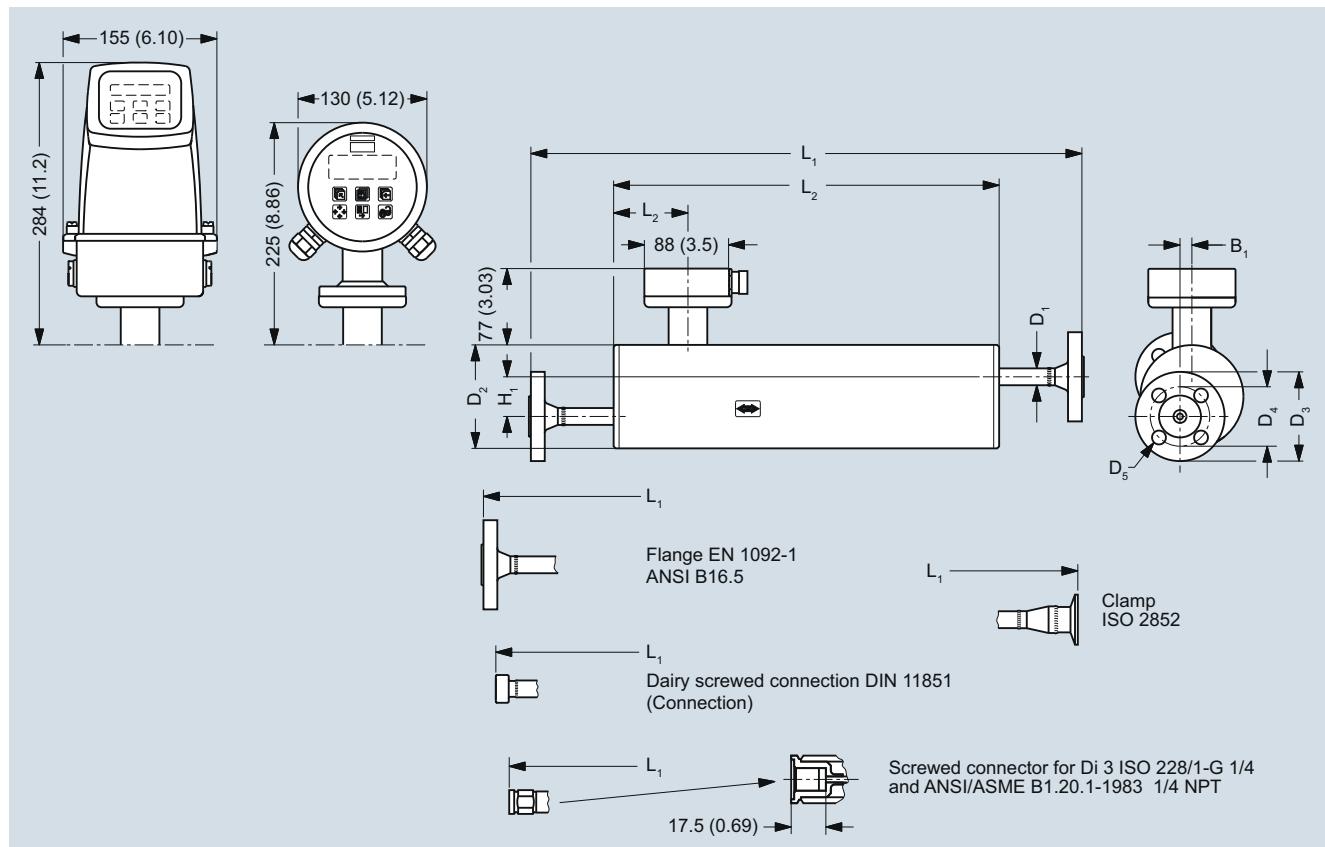Dimensional drawingsMASS 2100 sensor

Dimension in mm (inch)

For not listed variants please contact product support

Sensor size	Connections	Pressure rating	Size	L1 mm	L2 mm	L3 mm	H1 mm	B1 mm	D1 mm	D2 mm	D3 mm	D4 mm	D5 mm
DI (inch)	Type												
DI 3 (1/8)	Pipe thread ISO 228/1 - G 1/4	PN 100	1/4"	400	280	75.5	60	0	21.3	104	-	-	-
	Pipe thread ANSI/ASME B 1.20.1 - 1/4" NPT	PN 100	1/4"	400	280	75.5	60	0	21.3	104	-	-	-
DI 6 (1/4)	Flange EN 1092-1	PN 100	DN 10	580	390	62.0	40	12	17.0	104	100	70.0	14.0
	Flange EN 1092-1	PN 40	DN 10	560	390	62.0	40	12	17.0	104	90.0	60.0	14.0
	Flange ANSI B16.5	Class 150	1/2"	624	390	62.0	40	12	17.0	104	88.9	60.5	15.7
	Flange ANSI B16.5	Class 600	1/2"	608	390	62.0	40	12	17.0	104	95.3	66.5	15.7
	Screwed connection DIN 11851	PN 40	DN 10	532	390	62.0	40	12	17.0	104	-	-	-
	Clamp ISO 2852	PN 16	25 mm	570	390	62.0	40	12	17.0	104	-	-	-
DI 15 (1/2)	Flange EN 1092-1	PN 100	DN 15	634	444	75.5	44	20	21.3	129	105	75.0	14.0
	Flange EN 1092-1	PN 40	DN 15	620	444	75.5	44	20	21.3	129	95.0	65.0	14.0
	Flange ANSI B16.5	Class 150	1/2"	639	444	75.5	44	20	21.3	129	88.9	60.5	15.7
	Flange ANSI B16.5	Class 600	1/2"	660	444	75.5	44	20	21.3	129	95.3	66.5	15.7
	Screwed connection DIN 11851	PN 40	DN 15	586	444	75.5	44	20	21.3	129	-	-	-
	Clamp ISO 2852	PN 16	25 mm	624	444	75.5	44	20	21.3	129	-	-	-


Flow Measurement

SITRANS FC

Flow sensor MASS 2100 DI 3 to DI 15


For not listed variants please contact product support.

Sensor size	Connections		Pressure rating	Size	L1	L2	L3	H1	B1	D1	D2	D3	D4	D5
	DI (inch)	Type			inch	inch	inch	inch	inch	inch	inch	inch	inch	inch
DI 3 (1/8)	Pipe thread ISO 228/1 - G1/4	PN 100	1/4"	15.75	11.02	2.97	2.36	0	0.84	4.09	-	-	-	-
	Pipe thread ANSI/ASME B 1.20.1 - 1/4" NPT	PN 100	1/4"	15.75	11.02	2.97	2.36	0	0.84	4.09	-	-	-	-
DI 6 (1/4)	Flange EN 1092-1	PN 100	DN 10	22.83	15.35	2.44	1.57	0.47	0.67	4.09	3.94	2.76	0.55	
	Flange EN 1092-1	PN 40	DN 10	22.05	15.35	2.44	1.57	0.47	0.67	4.09	3.54	2.36	0.55	
	Flange ANSI B16.5	Class 150	1/2"	24.57	15.35	2.44	1.57	0.47	0.67	4.09	3.5	2.38	0.62	
	Flange ANSI B16.5	Class 600	1/2"	23.94	15.35	2.44	1.57	0.47	0.67	4.09	3.75	2.62	0.62	
	Screwed connection DIN 11851	PN 40	DN 10	20.94	15.35	2.44	1.57	0.47	0.67	4.09	-	-	-	
	Clamp ISO 2852	PN 16	25 mm	22.44	15.35	2.44	1.57	0.47	0.67	4.09	-	-	-	
DI 15 (1/2)	Flange EN 1092-1	PN 100	DN 15	24.96	17.48	2.97	1.73	0.79	0.84	5.08	2.95	4.13	0.55	
	Flange EN 1092-1	PN 40	DN 15	24.41	17.48	2.97	1.73	0.79	0.84	5.08	3.74	2.56	0.55	
	Flange ANSI B16.5	Class 150	1/2"	25.16	17.48	2.97	1.73	0.79	0.84	5.08	3.5	2.38	0.62	
	Flange ANSI B16.5	Class 600	1/2"	25.98	17.48	2.97	1.73	0.79	0.84	5.08	3.75	2.62	0.62	
	Screwed connection DIN 11851	PN 40	DN 15	23.07	17.48	2.97	1.73	0.79	0.84	5.08	-	-	-	
	Clamp ISO 2852	PN 16	25 mm	24.57	17.48	2.97	1.73	0.79	0.84	5.08	-	-	-	

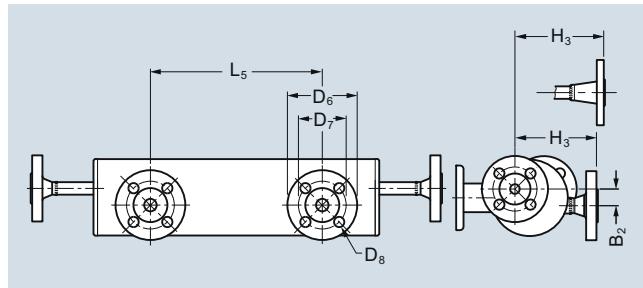
MASS 2100 sensor with "heating jacket"

Dimensions in mm (inch)

Sensor size	Connections heated		L5	H3	B2	D6	D7	D8
DI (inch)	Type	Pressure rating	Size	mm (inch)	mm (inch)	mm (inch)	mm (inch)	mm (inch)
DI 3 (1/8)	EN 1092-1	PN 40	DN 15	234 (9.21)	122 (4.8)	22 (0.87)	95 (3.74)	65.0 (2.56)
	ANSI B16.5	Class 150	1/2"	234 (9.21)	131.6 (5.18)	22 (0.87)	88.9 (3.5)	60.5 (2.38)
DI 6 (1/4)	EN 1092-1	PN 40	DN 15	234 (9.21)	112 (4.41)	22.7 (0.89)	95 (3.74)	65.0 (2.56)
	ANSI B16.5	Class 150	1/2"	234 (9.21)	121.6 (4.79)	22.7 (0.89)	88.9 (3.5)	60.5 (2.38)
DI 15 (1/2)	EN 1092-1	PN 40	DN 15	234 (9.21)	126.5 (4.98)	31.5 (1.24)	95 (3.74)	65.0 (2.56)
	ANSI B16.5	Class 150	1/2"	234 (9.21)	136.1 (5.36)	31.5 (1.24)	88.9 (3.5)	60.5 (2.38)

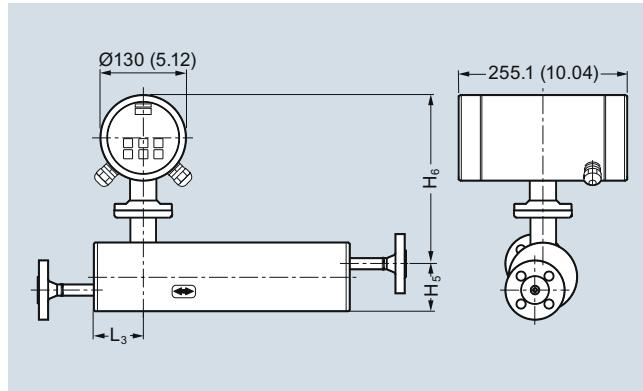MASS 2100 and MASS 6000 Ex d compact version

Dimensions in mm (inch)

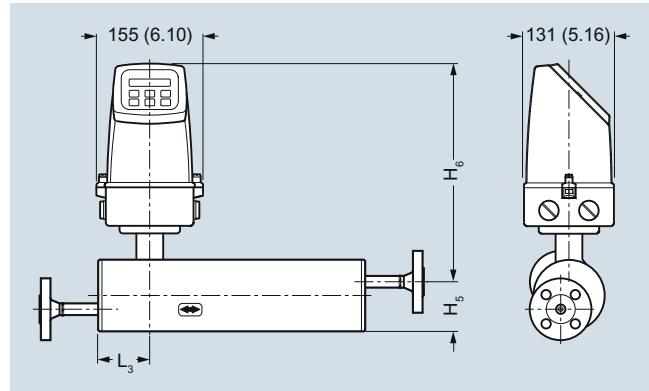MASS 2100 and MASS 6000 IP67 compact version

Dimensions in mm (inch)

Sensor size [DI (inch)]	L ₃ [mm (inch)]	H ₅ [mm (inch)]	H ₆ [mm (inch)]	H ₅ + H ₆ [mm (inch)]
3 (1/8)	75 (2.95)	82 (3.23)	247 (9.72)	329 (12.95)
6 (1/4)	62 (2.44)	72 (2.83)	257 (10.12)	329 (12.95)
15 (1/2)	75 (2.95)	87 (3.43)	267 (10.51)	354 (13.94)

Sensor size [DI (inch)]	L ₃ [mm (inch)]	H ₅ [mm (inch)]	H ₆ [mm (inch)]	H ₅ + H ₆ [mm (inch)]
3 (1/8)	75 (2.95)	82 (3.23)	306 (12.04)	388 (15.28)
6 (1/4)	62 (2.44)	72 (2.83)	316 (12.44)	388 (15.28)
15 (1/2)	75 (2.95)	87 (3.43)	326 (12.83)	413 (16.26)